

# SuperLite™ II-XL 120

120 Minute  
Fire Resistive Glazing

## PRODUCT ADVANTAGES



- ▶ **Maximum fire and impact safety with hose stream and full radiant heat protection.**
- ▶ Largest tested and approved sizes up to 4,876 in.<sup>2</sup> (3.15 m<sup>2</sup>) in standard 1-1/2 in. (39 mm) profile.
- ▶ Tint-free and optically clear. Perfect for property line requirements.
- ▶ Acoustical value of 44 STC.
- ▶ Available in custom architectural make-ups, such as laminated glass and energy-saving insulated units with NFRC certifications when used with GPX Architectural Series Framing.
- ▶ Can be customized to protect against forced entry, bullets, blast, hurricane, sound and more.
- ▶ 5 year manufacturer's warranty.
- ▶ USA manufactured for fast lead times and competitive pricing.



Now available with Starphire® Ultra-Clear Glass by PPG

### Largest Sizes for Sidelites, Windows, Transoms and Walls

Fire Rating	Max. CV Area	Max. CV Width	Max. CV Height	Stops
All 120 minute wall applications	4,876 in. <sup>2</sup> (3.15 m <sup>2</sup> )	124 in. (3.15 m)	124 in. (3.15 m)	5/8 in. (16 mm)

1 in. stops recommended (25 mm)

## UL AND INTERTEK TESTED AND CERTIFIED




SuperLite II-XL is listed and labeled by Intertek and Underwriters Laboratories, nationally recognized testing laboratories approved by OSHA.

## APPROVALS

UL 9, UL 10B, UL 10C, UL 263, NFPA 80, NFPA 251, NFPA 252, NFPA 257, ASTM E119, ASTM E152, ASTM E163, ASTM E2074, ASTM E2010-01, CPSC 16 CFR 1201 Cat. II, ANSI Z97.1, ULC CAN4-S101, ULC CAN4-S104, ULC CAN4-S106, NFRC 100, NFRC 200, NFRC 500.

## FIRE RESISTIVE

Contains smoke, flames and blocks the passage of radiant heat.

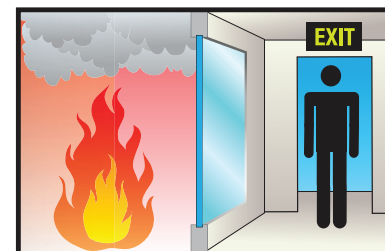

## SPECIFICATIONS

**Thickness:** 1-1/2 in. (39 mm) standard thickness;  
2-1/4 in. (57 mm) when insulated with Low-E

**Weight:** 12 lbs./sq. ft. (59 kg/m<sup>2</sup>)  
in 1-1/2 in. (39 mm) standard profile

**Sound Transmission Rating:** STC 44  
rating in 1-1/2 in. (39 mm) standard profile

**Outdoor-Indoor Transmission Class:**  
OITC 40 rating in 1-1/2 in. (39 mm)  
standard profile

**Fire Rating:** 120 minutes with hose stream  
Meets ASTM E119 and NFPA 251

**Impact Safety Rating:**  
CPSC 16 CFR 1201 Cat. I and II

**NFRC Certifications with  
GPX Architectural Series Framing:**  
0.34 U-Factor when insulated with  
Solarban 60

0.27 SHGC when insulated with  
Solarban 60

55 Condensation Resistance when  
insulated with Solarban 60

**3-Part Specifications:**  
Available at  
[www.safti.com/specifications](http://www.safti.com/specifications)



Made in the USA

# SuperLite™ II-XL 120

120 Minute  
Fire Resistive Glazing



**Project:** Reece School in New York, NY  
**Architect:** Platt Byard Dovell White Architects LLP  
**Contract Glazier:** Industrial Window Corporation  
**Products Used:** SuperLite II-XL 120 in GPX Architectural Series




**Project:** CA Endowment Building in Los Angeles, CA  
**Architect:** House and Robertson Architects  
**Contract Glazier:** Benson Industries, Inc.  
**Products Used:** SuperLite II-XL 120 in GPX Architectural Series

Here are two examples of how fire resistive SuperLite II-XL 120 in GPX Architectural Series Framing enhances interior spaces with elegant transparency during normal use, while protecting building occupants from the danger of radiant heat and providing safe egress during a fire.

## TYPICAL DETAILS *More details available at [www.safti.com/details](http://www.safti.com/details)*

### SuperLite II-XL 120 in GPX Architectural Series Framing and SuperLite II-XL 90 in GPX Architectural Series Door

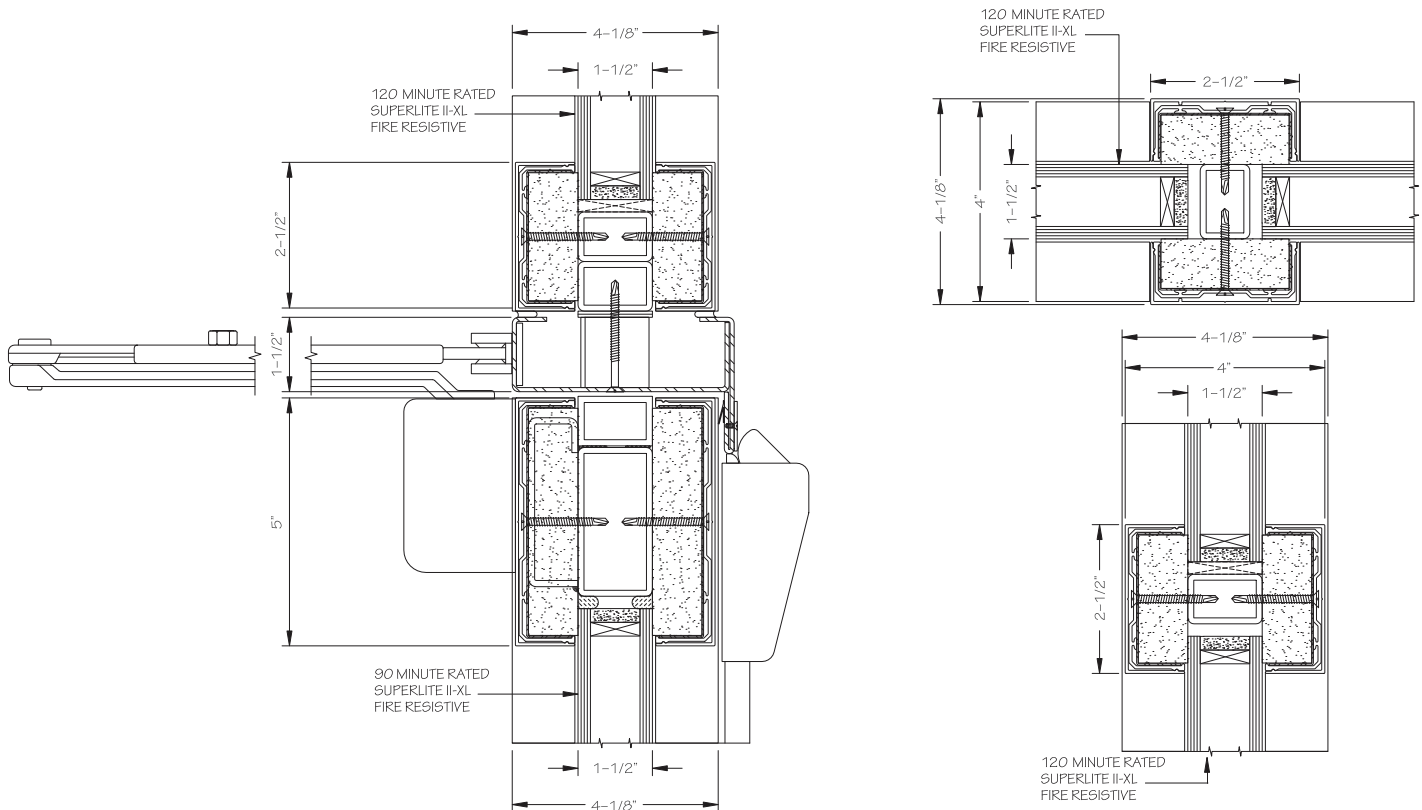

The information provided herein is for general reference only and is subject to change without notice. Please visit [www.safti.com](http://www.safti.com) for the most up to date information.

© SAFTI FIRST April 2017

[www.safti.com](http://www.safti.com)

**SAFTIFIRST™**  
SAFETY AND FIRE TECHNOLOGY INC.

888.653.3333