SuperLite™ X-45/60/90

Patent Pending

45/60/90 Minute Fire Protective Glazing

PRODUCT ADVANTAGES

FIRE RATED | HOSE STREAM | GREEN | IMPACT RATED | THERMAL SHOCK | POSITIVE PRESSURE

- **Most economical fire and safety rated glazing meeting all the standards for 45/60/90 minute doors.**
- Non-wired clear glazing providing the highest visual clarity.
- Impact safety rated to meet federal and code standards.
- Vision lite kits available in these sizes: 5x35", 6x27", 7x22", and 12x12".
- Can be used for interior and exterior applications.
- Lifetime manufacturer's warranty.
- USA manufactured for fast delivery and competitive pricing.

Fire Rating	Application	Max. CV Area	Max. CV Width	Max. CV Height	Stops
45 minutes	Doors	100 in.² (0.06 m²)	10 in. (0.25 m)	33 in. (0.84 m)	5/8 in. (16 mm)
60-90 minutes	Doors (T)	100 in.² (0.06 m²)	10 in. (0.25 m)	33 in. (0.84 m)	5/8 in. (16 mm)

TESTED AND CERTIFIED TO UL 10B AND 10C

SuperLite X-45/60/90 vision kit in a 90 minute temperature rise door

SuperLite X-45/60/90 is listed and labeled by Intertek/Warnock-Hersey Inc., a nationally recognized testing laboratory approved by OSHA.

c US Intertek

FIRE PROTECTIVE

Contains smoke and flames.
Does not block radiant heat.

For fire resistive glazing that blocks radiant heat see SuperLite II-XL.

SPECIFICATIONS

Thickness: 3/4 in. (19 mm)

Weight: 9.0 lbs./sq.ft. (44 kg/m²)

Fire Rating: 45/60/90 minutes with hose stream

Sound Transmission Rating: Approx. STC 38

Solar Heat Gain Coefficient: 0.67 SHGC

Impact Safety Rating: CPSC 16 CFR 1201 Cat. I and II

APPROVALS

UL 10B, UL 10C, NFPA 80, NFPA 252, ULC CAN4-S104, CPSC 16 CFR 1201 Cat. I & II.

3-Part Specifications:
Available at
www.safti.com/specifications

Made in the USA

SuperLite™ X-45/60/90

Patent Pending

45/60/90 Minute Fire Protective Glazing

TYPICAL DETAILS

More details available at www.safti.com/details

SuperLite X-45/60/90 in GPX Builders Series Temperature Rise Door and SuperLite II-XL 120 in GPX Architectural Series Transoms

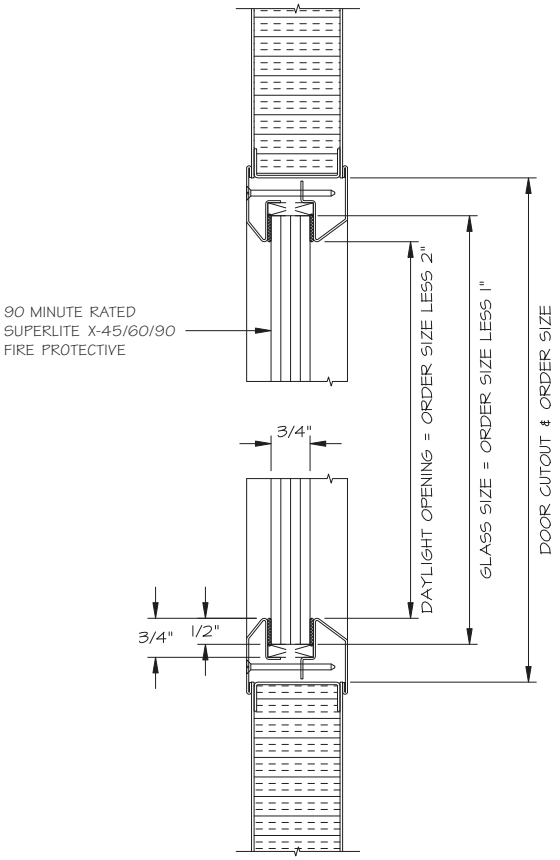

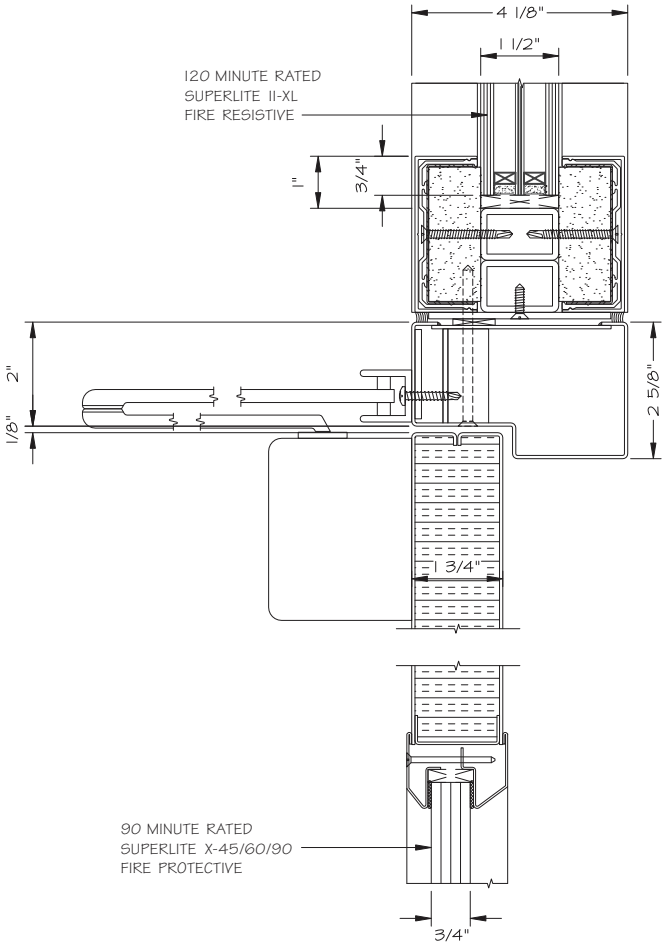

The information provided herein is for reference only and is subject to change without notice. Please visit www.safti.com for the most up to date information. © SAFTI *FIRST* March 2015