

PRODUCT ADVANTAGES



- ▶ **Maximum fire and impact safety with hose stream and full radiant heat protection.**
- ▶ Largest tested and approved sizes up to 4,876 in.² (3.15 m²) in standard 1-1/2 in. (38 mm) profile.
- ▶ Tint-free and optically clear. Perfect for property line requirements.
- ▶ Acoustical value of 44 STC.
- ▶ Available in custom architectural make-ups, such as laminated glass and energy-saving insulated units with NFRC certifications when used with GPX Framing.
- ▶ 5 year manufacturer's warranty.
- ▶ USA manufactured for fast lead times and competitive pricing.



Now available with Starphire® Ultra-Clear Glass by PPG

Largest Sizes for Doors and Exterior Windows

Fire Rating	Max. CV Area	Max. CV Width	Max. CV Height	Stops
All 90 minute applications	4,876 in. ² (3.15 m ²)	124 in. (3.15 m)	124 in. (3.15 m)	5/8 in. (16 mm)

1 in. stops recommended (25 mm)

UL AND INTERTEK/WHI TESTED AND CERTIFIED




SuperLite II-XL is listed and labeled by Intertek/Warnock-Hersey Inc. and Underwriters Laboratories, nationally recognized testing laboratories approved by OSHA.

APPROVALS

UL 9, UL 10B, UL 10C, UL 263, NFPA 80, NFPA 251, NFPA 252, NFPA 257, ASTM E119, ASTM E152, ASTM E163, ASTM E2074, ASTM E2010-01, CPSC 16 CFR 1201 Cat. II, ULC CAN4-S101, ULC CAN4-S104, ULC CAN4-S106, NFRC 100, NFRC 200, NFRC 500.

FIRE RESISTIVE

Contains smoke, flames and blocks the passage of radiant heat.

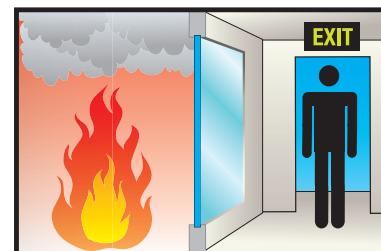

SPECIFICATIONS

Thickness: 1-1/2 in. (38 mm) standard thickness;
2-1/4 in. (57 mm) when insulated with Low-E

Weight: 12 lbs./sq. ft. (59 kg/m²)
in 1-1/2 in. (38 mm) standard profile

Sound Transmission Rating: STC 44
rating in 1-1/2 in. (38 mm) standard profile

Fire Rating: 90 minutes with hose stream
Meets ASTM E119 and NFPA 251

Impact Safety Rating:
CPSC 16 CFR 1201 Cat. I and II

NFRC Certifications with GPX Framing:
0.34 U-Factor when insulated with
Solarban 60

0.27 SHGC when insulated with
Solarban 60

55 Condensation Resistance when
insulated with Solarban 60

3-Part Specifications:

Available at

www.safti.com/specifications

Made in the USA

SuperLite™ II-XL 90

90 Minute
Fire Resistant Glazing




Fire resistant GPX Doors and Framing with SuperLite II-XL glazing provide transparency to this two-hour wall; enhancing the sense of openness by maximizing natural light in interior spaces, with the added benefits of safe egress and personal security.

Project: CSU Fullerton Recreation Center in Fullerton, CA
Architect: Langdon and Wilson
Glazier: Woodbridge Glass

TYPICAL DETAILS *More details available at www.safti.com/details*

SuperLite II-XL 120 in GPX Sidelite/Transom and
SuperLite II-XL 90 in HMTR Door

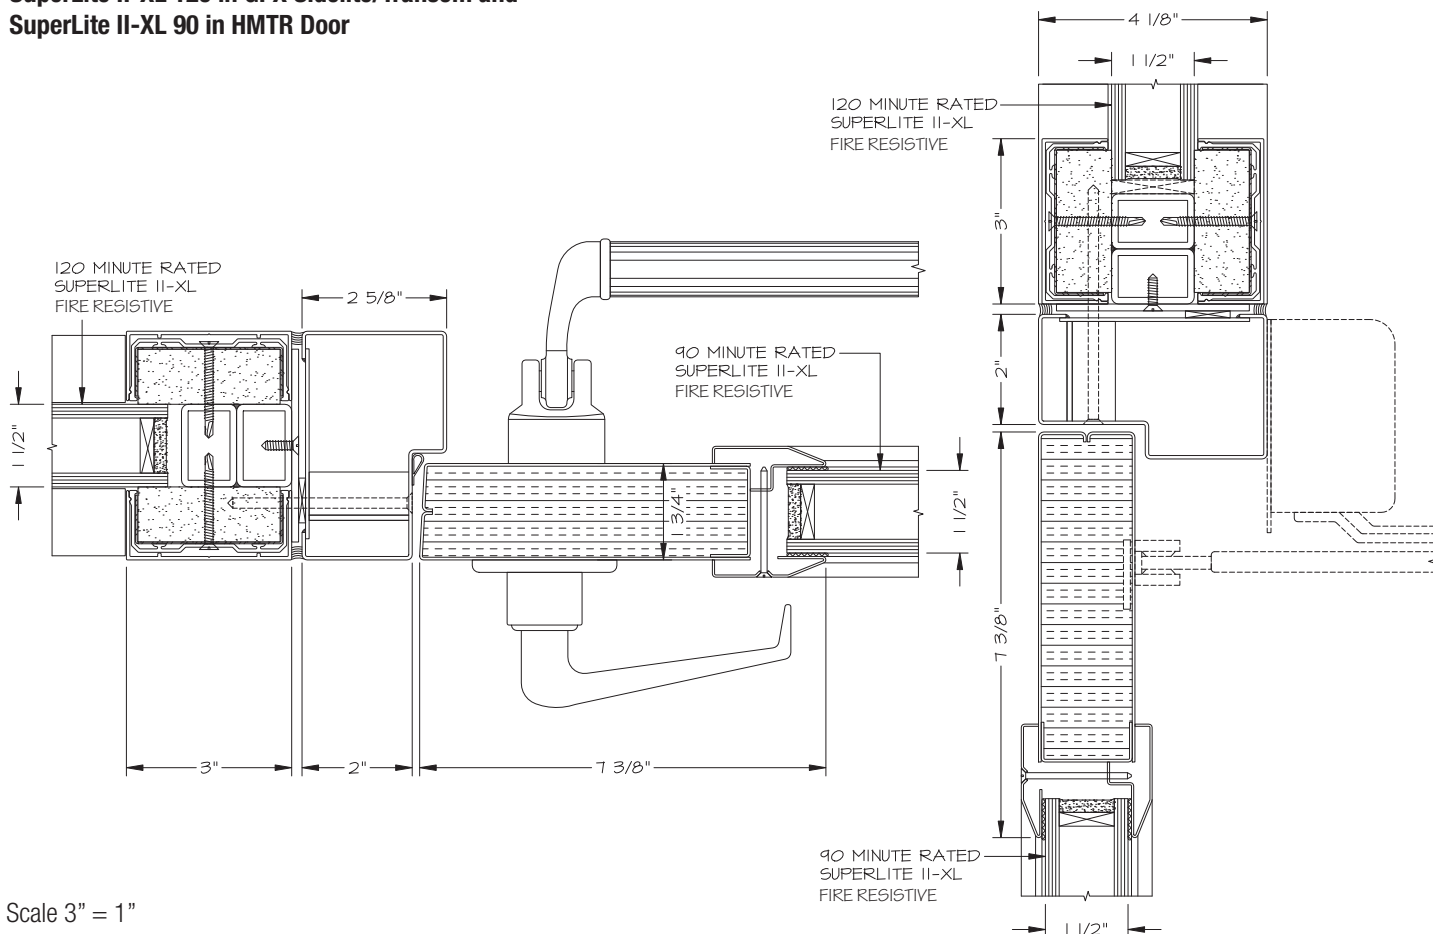

Scale 3" = 1"

The information provided herein is for general reference only. Please visit www.safti.com for the most updated information. © SAFTI FIRST June 2014