

# SuperSecure® II-XLS 45-120

45-120 Minute  
Clear, Forced Entry and  
Fire Resistive Rated Glazing

## PRODUCT ADVANTAGES



- ▶ The only wire-free, fire resistive rated security glazing to meet CDCR 860-14a testing requirements and ASTM F1915 Grades 1-4.
- ▶ Meets ASTM E119 / UL 263 / NFPA 251 requirements with hose stream requirements.
- ▶ Largest tested and listed sizes for wire-free, fire resistive rated security glazing.
- ▶ High STC ratings.
- ▶ Standard 5 year limited warranty.
- ▶ USA manufactured for fast lead times and competitive pricing.

## PRODUCT SIZES

### Largest Sizes for Doors, Openings and Walls

| Fire Rating    | Max. CV Area                                     | Max. CV Width      | Max. CV Height     | Stops            |
|----------------|--|--------------------|--------------------|------------------|
| 45-60 minutes  | 4,952 in. <sup>2</sup><br>(3.19 m <sup>2</sup> ) | 96 in.<br>(2.44 m) | 96 in.<br>(2.44 m) | 1 in.<br>(25 mm) |
| 90-120 minutes | 4,876 in. <sup>2</sup><br>(3.15 m <sup>2</sup> ) | 96 in.<br>(2.44 m) | 96 in.<br>(2.44 m) | 1 in.<br>(25 mm) |

Please call SAFTI FIRST® for custom sizes exceeding 96 in. (2.44 m) up to 124 in. (3.15 m).  
See [Quality and Construction Information for SAFTI FIRST® Fire Resistive Glass](#) on the website for more information.

## INTERTEK TESTED AND CERTIFIED




SuperSecure® II-XLS is listed and labeled by Intertek, a nationally recognized testing laboratory approved by OSHA.

## APPROVALS

UL, UL 10B, UL 10C, UL 263, NFPA 251, NFPA 252, NFPA 257, ASTM E119, ASTM E152, ASTM E163, ASTM E2074, ASTM E2010-01, ASTM F1233, ASTM F1915, CPSC 16 CFR 1201 Cat. II, ANSI Z97.1, CDCR 860-14a.

## FIRE RESISTIVE

Contains smoke and flames, and blocks the passage of radiant heat.

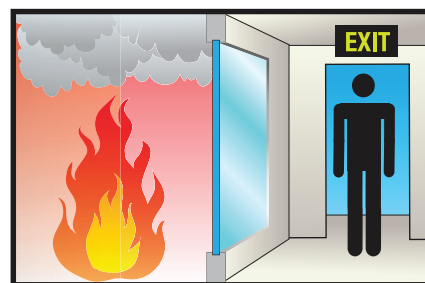

## SPECIFICATIONS

Thickness and weight varies on fire and attack rating required. Contact SAFTI FIRST® for more information.

### Appearance:

Clear, non-wired glazing

### Fire Rating:

45-120 minutes with hose stream  
Meets ASTM E119 / UL 263 / NFPA 251

### Impact Safety Rating:

CPSC 16 CFR 1201 Cat. I and II

### Forced Entry Rating:

CDCR 860-14a testing requirements & ASTM F1915 Grades 1-4

### 3-Part Specifications:

Available at  
[www.safti.com/specifications](http://www.safti.com/specifications)



Made in the USA

The information provided herein is for general reference only and is subject to change without notice. Please visit [www.safti.com](http://www.safti.com) for the most up to date information.

© SAFTI FIRST® October 2021

[www.safti.com](http://www.safti.com)

**SAFTI FIRST**  
SAFETY AND FIRE TECHNOLOGY INC.

888.653.3333