

SuperSecure® II-XLS 45-120

45-120 Minute
Clear, Forced Entry and
Fire Resistive Rated Glazing

PRODUCT ADVANTAGES



- ▶ The only wire-free, fire resistive rated security glazing to meet CDCR 860-14a testing requirements and ASTM F1915 Grades 1-4.
- ▶ Meets ASTM E119 / UL 263 / NFPA 251 requirements with hose stream requirements.
- ▶ Largest tested and listed sizes for wire-free, fire resistive rated security glazing.
- ▶ High STC ratings.
- ▶ Standard 5 year limited warranty.
- ▶ USA manufactured for fast lead times and competitive pricing.

PRODUCT SIZES

Largest Sizes for Doors, Openings and Walls

Fire Rating	Max. CV Area	Max. CV Width	Max. CV Height	Stops
45-60 minutes	4,952 in. ² (3.19 m ²)	96 in. (2.44 m)	96 in. (2.44 m)	1 in. (25 mm)
90-120 minutes	4,876 in. ² (3.15 m ²)	96 in. (2.44 m)	96 in. (2.44 m)	1 in. (25 mm)

Please call SAFTI FIRST® for custom sizes exceeding 96 in. (2.44 m) up to 124 in. (3.15 m).
See [Quality and Construction Information for SAFTI FIRST® Fire Resistive Glass](#) on the website for more information.

INTERTEK TESTED AND CERTIFIED




SuperSecure® II-XLS is listed and labeled by Intertek, a nationally recognized testing laboratory approved by OSHA.

APPROVALS

UL, UL 10B, UL 10C, UL 263, NFPA 251, NFPA 252, NFPA 257, ASTM E119, ASTM E152, ASTM E163, ASTM E2074, ASTM E2010-01, ASTM F1233, ASTM F1915, CPSC 16 CFR 1201 Cat. II, ANSI Z97.1, CDCR 860-14a.

FIRE RESISTIVE

Contains smoke and flames, and blocks the passage of radiant heat.

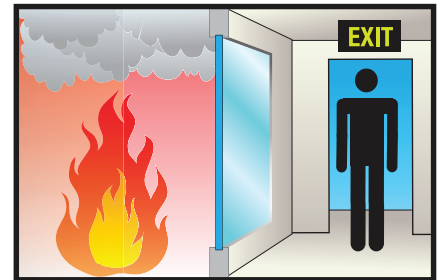

SPECIFICATIONS

Thickness and weight varies on fire and attack rating required. Contact SAFTI FIRST® for more information.

Appearance:

Clear, non-wired glazing

Fire Rating:

45-120 minutes with hose stream
Meets ASTM E119 / UL 263 / NFPA 251

Impact Safety Rating:

CPSC 16 CFR 1201 Cat. I and II

Forced Entry Rating:

CDCR 860-14a testing requirements & ASTM F1915 Grades 1-4

3-Part Specifications:

Available at

www.safti.com/specifications



Made in the USA

The information provided herein is for general reference only and is subject to change without notice. Please visit www.safti.com for the most up to date information.

© SAFTI FIRST® October 2021

www.safti.com

 **SAFTI FIRST**
SAFETY AND FIRE TECHNOLOGY INC.

888.653.3333