


GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES FIRE RESISTIVE SINGLE DOOR WITH SUPERLITE II-XL 60 IGU

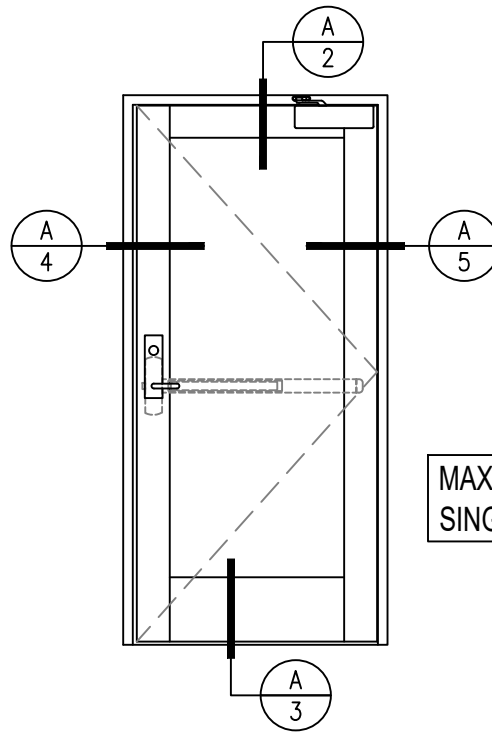

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES FIRE RESISTIVE PAIR DOOR WITH SUPERLITE II-XL 60 IGU

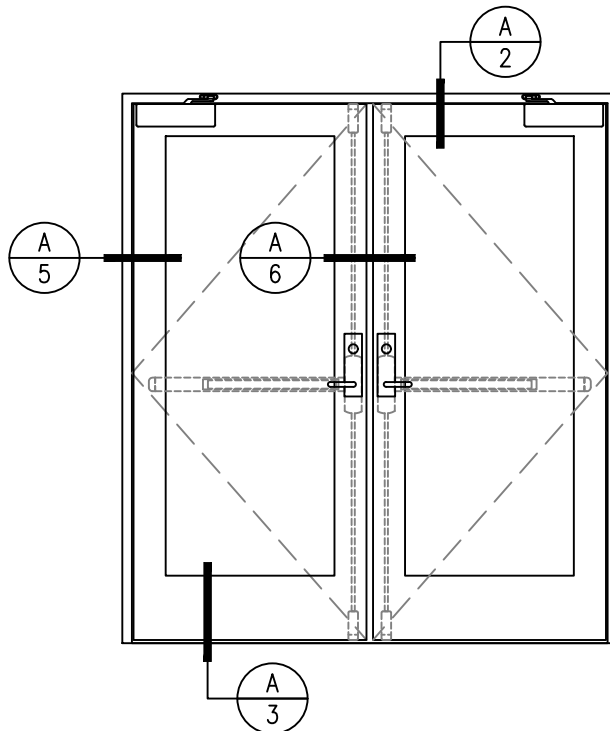

MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE DOORS

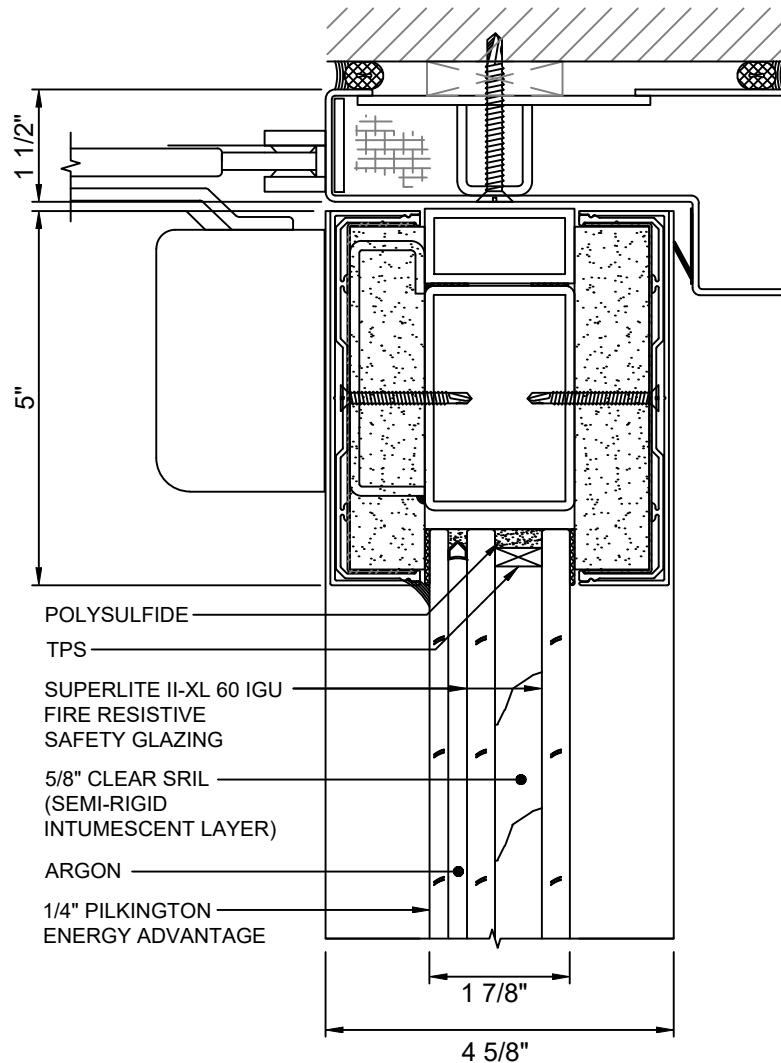


A
2 DOOR TOP RAIL
WITH SUPERLITE II-XL 60 IGU


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE DOORS

WITH & WITHOUT DOOR BOTTOM

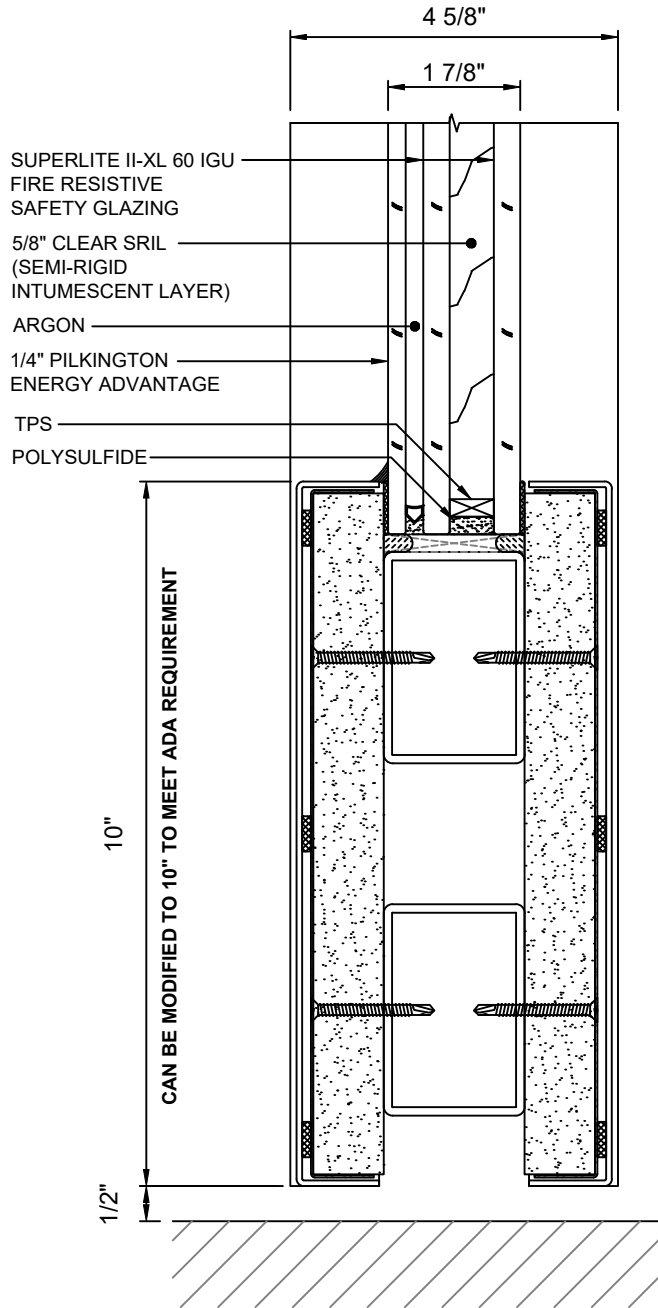


A
3 DOOR BOTTOM RAIL
WITHOUT DOOR BOTTOM
WITH SUPERLITE II-XL 60 IGU

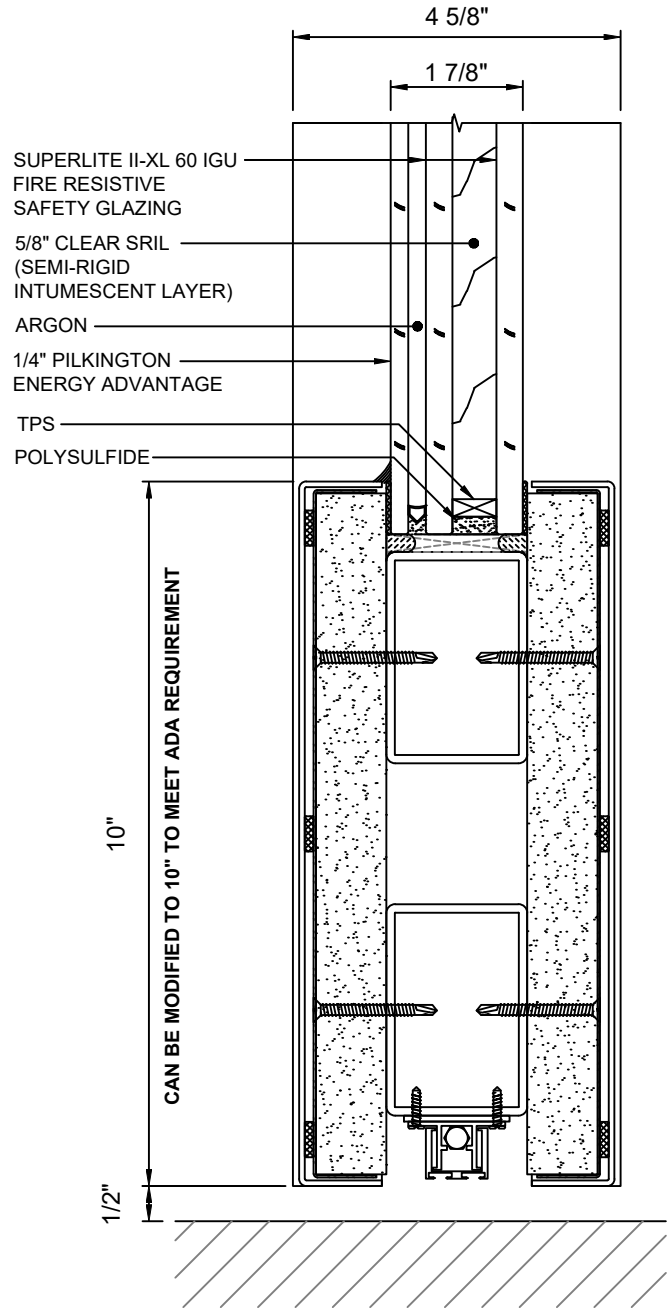

A
3 DOOR BOTTOM RAIL
WITH DOOR BOTTOM
WITH SUPERLITE II-XL 60 IGU

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

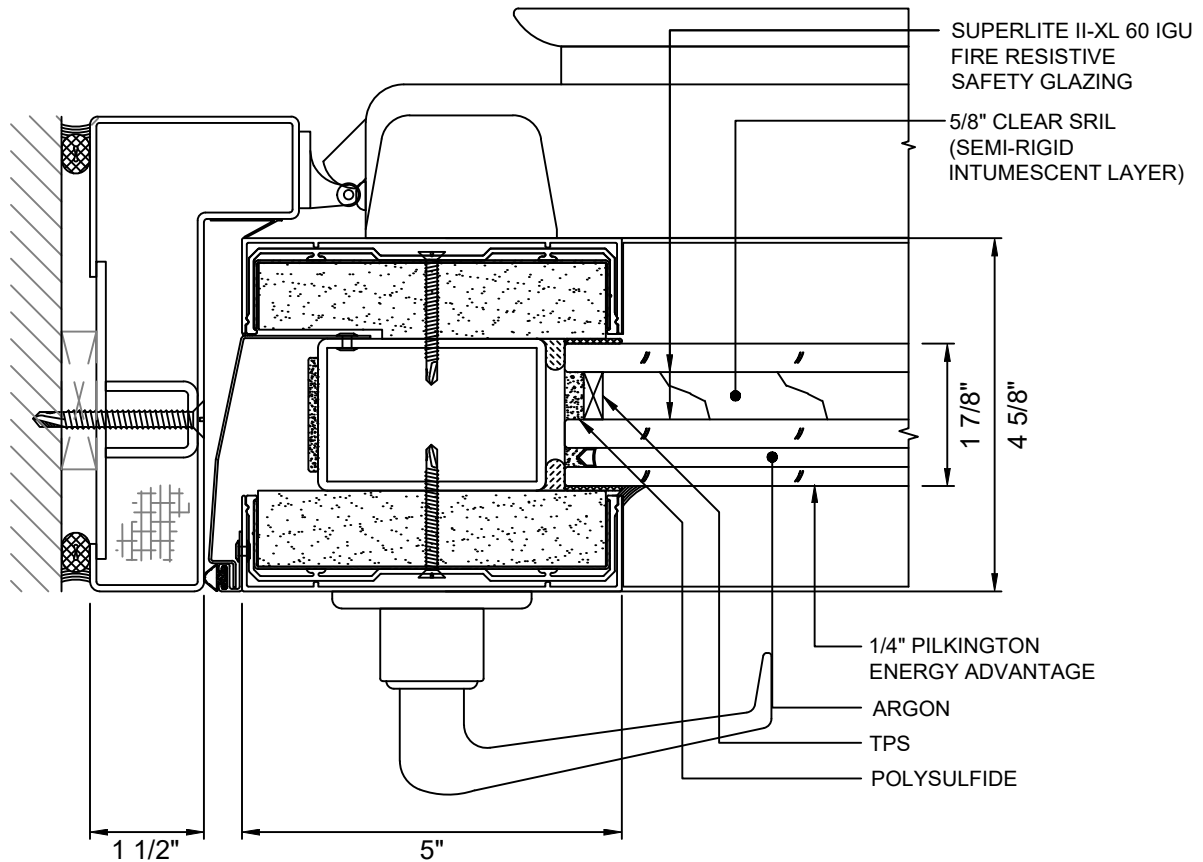

A
4 DOOR JAMB AT LOCK
WITH **SUPERLITE II-XL 60 IGU**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

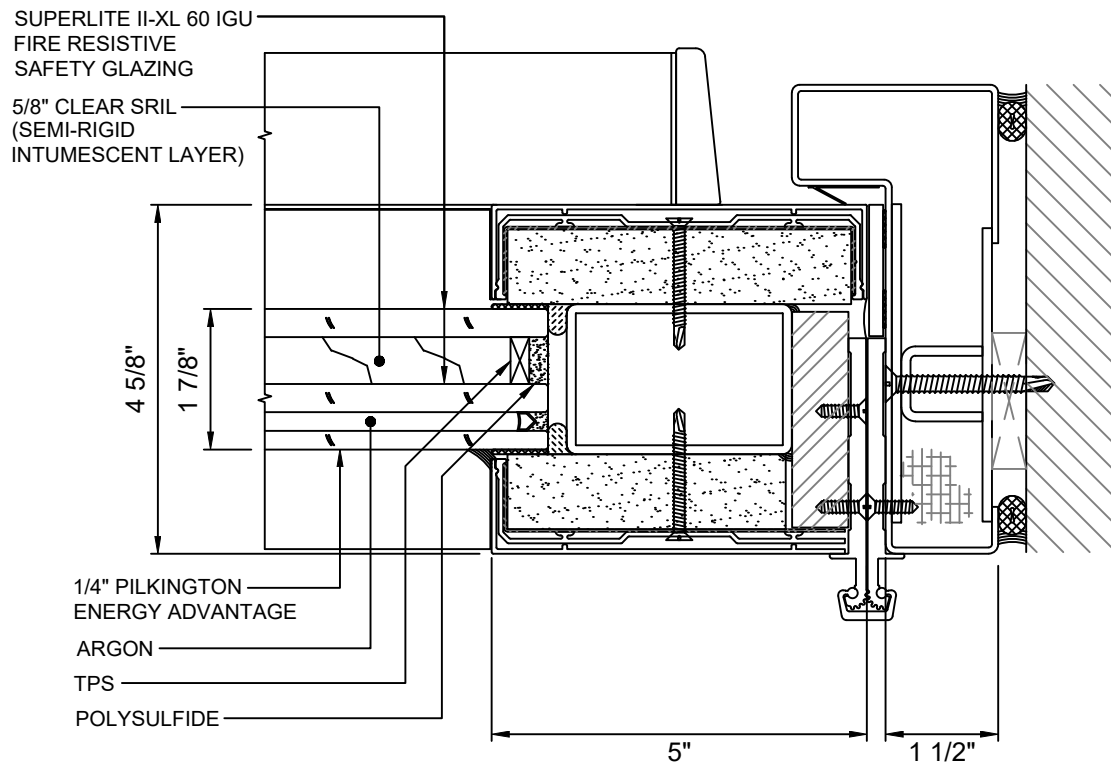

A
5 DOOR JAMB AT HINGE
WITH **SUPERLITE II-XL 60 IGU**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE DOORS

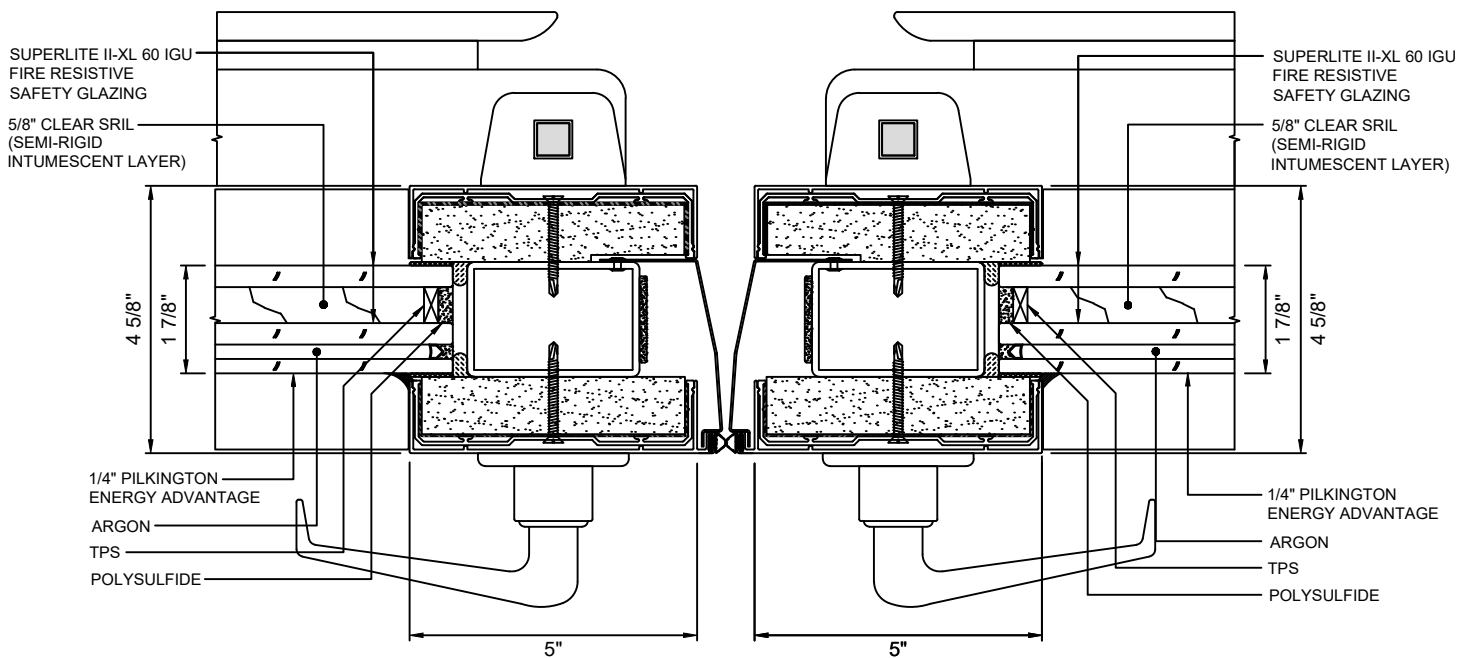

A
6 MEETING STILES
WITH SUPERLITE II-XL 60 IGU