



GPX ARCHITECTURAL SERIES 60 MINUTE FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES FIRE RESISTIVE SINGLE DOOR WITH SUPERLITE II-XL 60

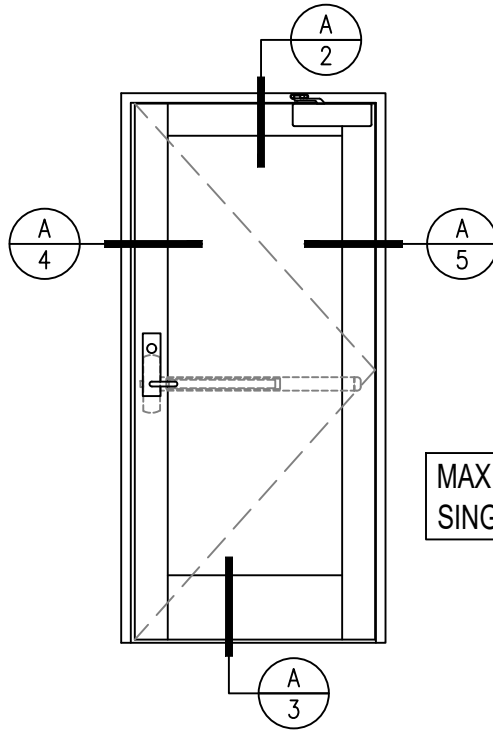

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES FIRE RESISTIVE PAIR DOOR WITH SUPERLITE II-XL 60

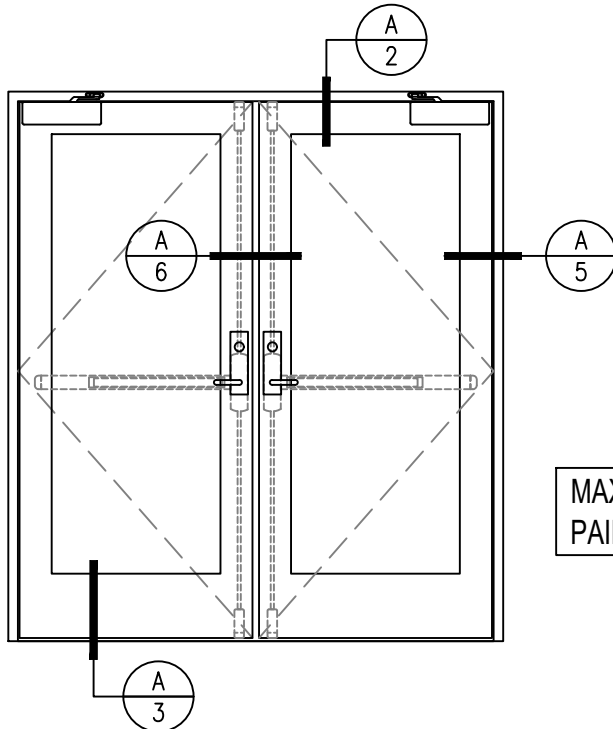

MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

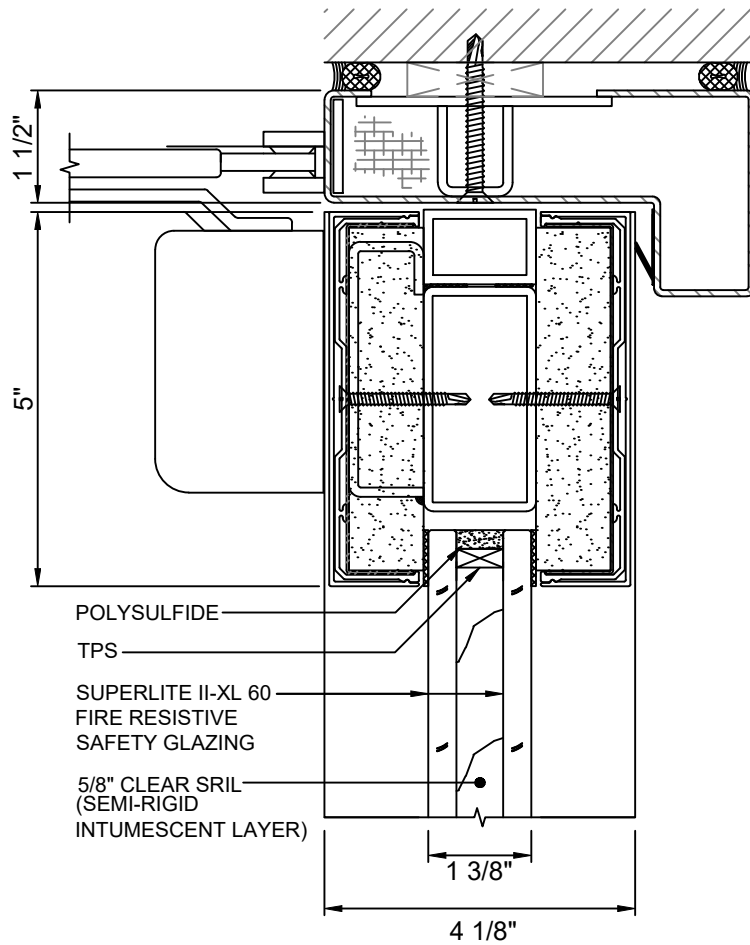


A DOOR TOP RAIL
2 WITH **SUPERLITE II-XL 60**

GPX ARCHITECTURAL SERIES 60 MINUTE FIRE RESISTIVE DOORS

WITH & WITHOUT THRESHOLD

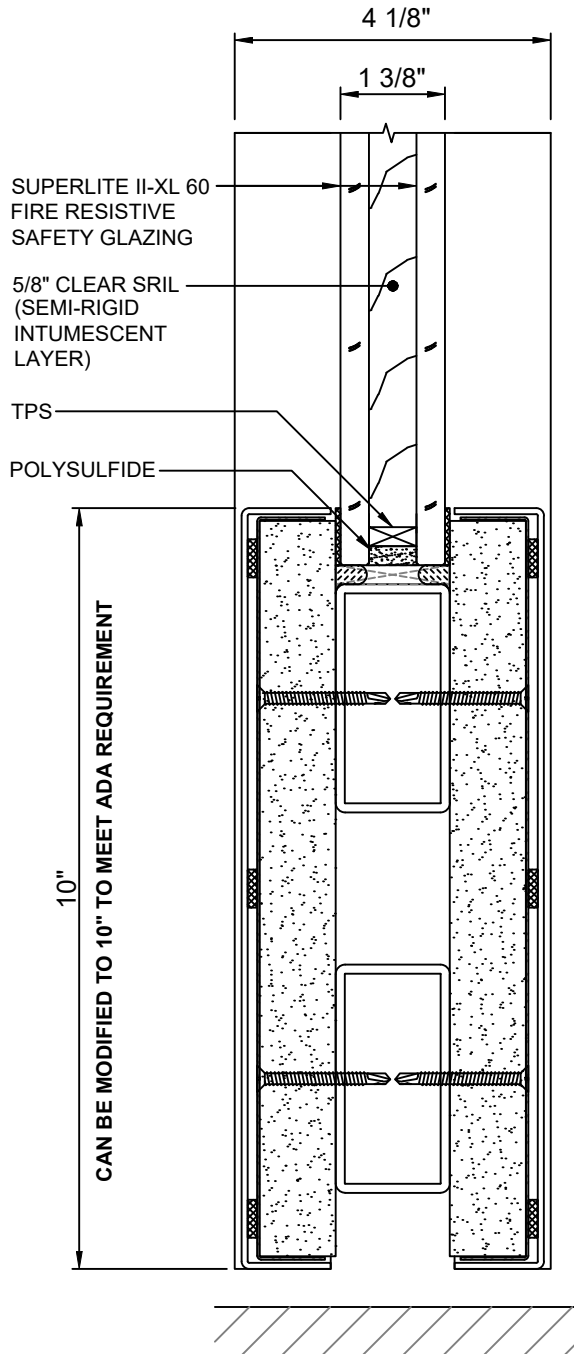


A
3 DOOR BOTTOM RAIL
WITHOUT THRESHOLD
WITH SUPERLITE II-XL 60

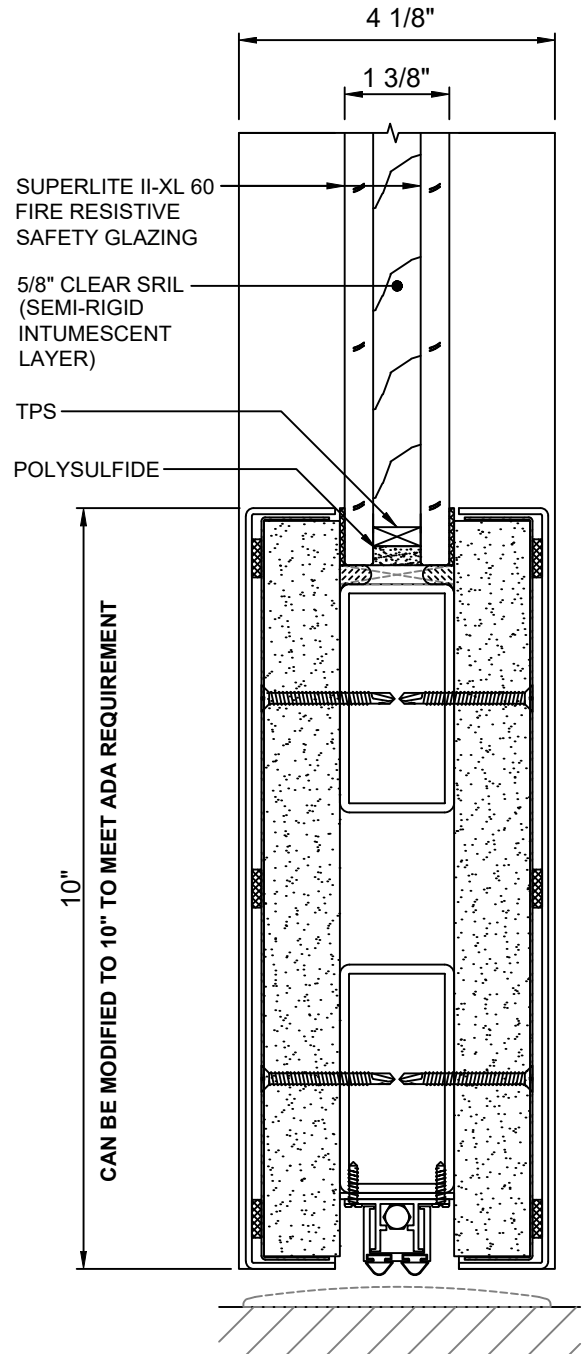

A
3 DOOR BOTTOM RAIL
WITH THRESHOLD
WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

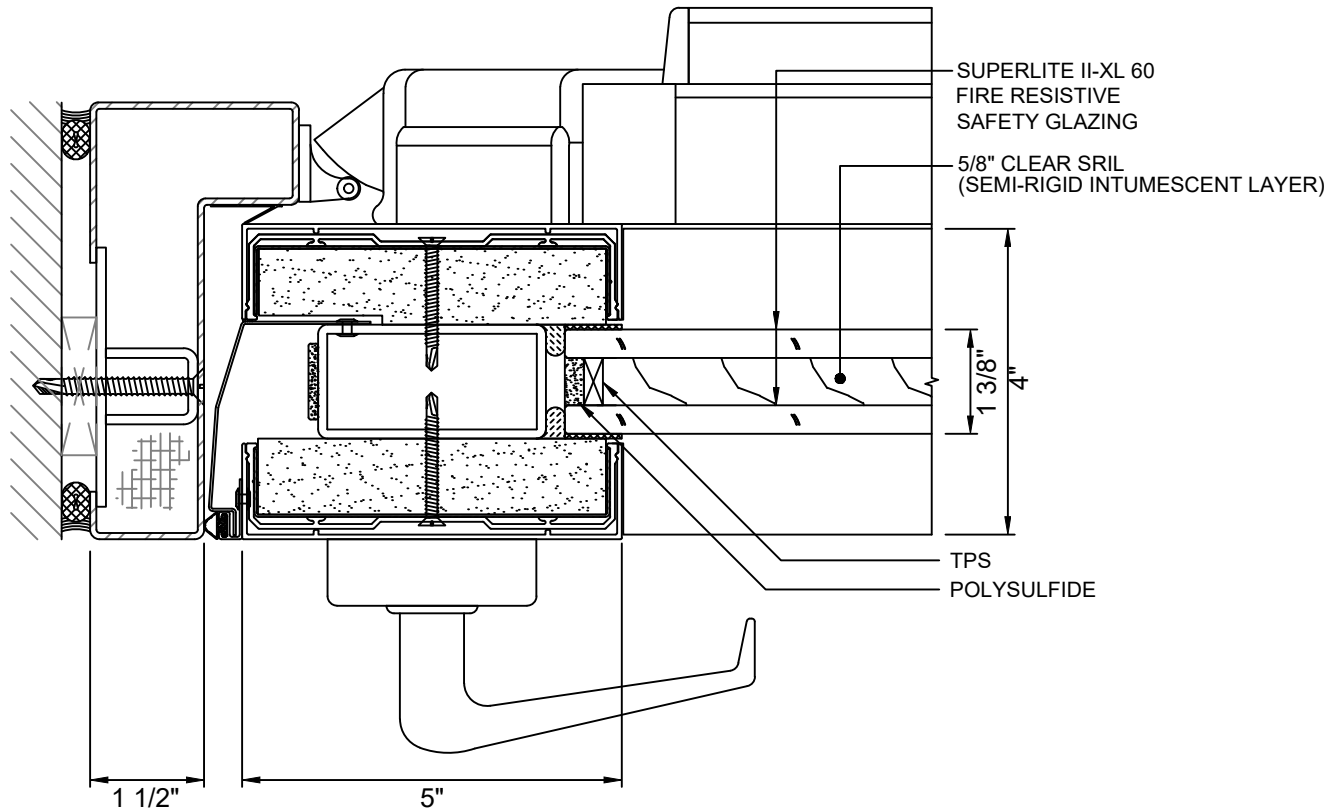

A DOOR JAMB AT LOCK
4 WITH **SUPERLITE II-XL 60**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE DOORS

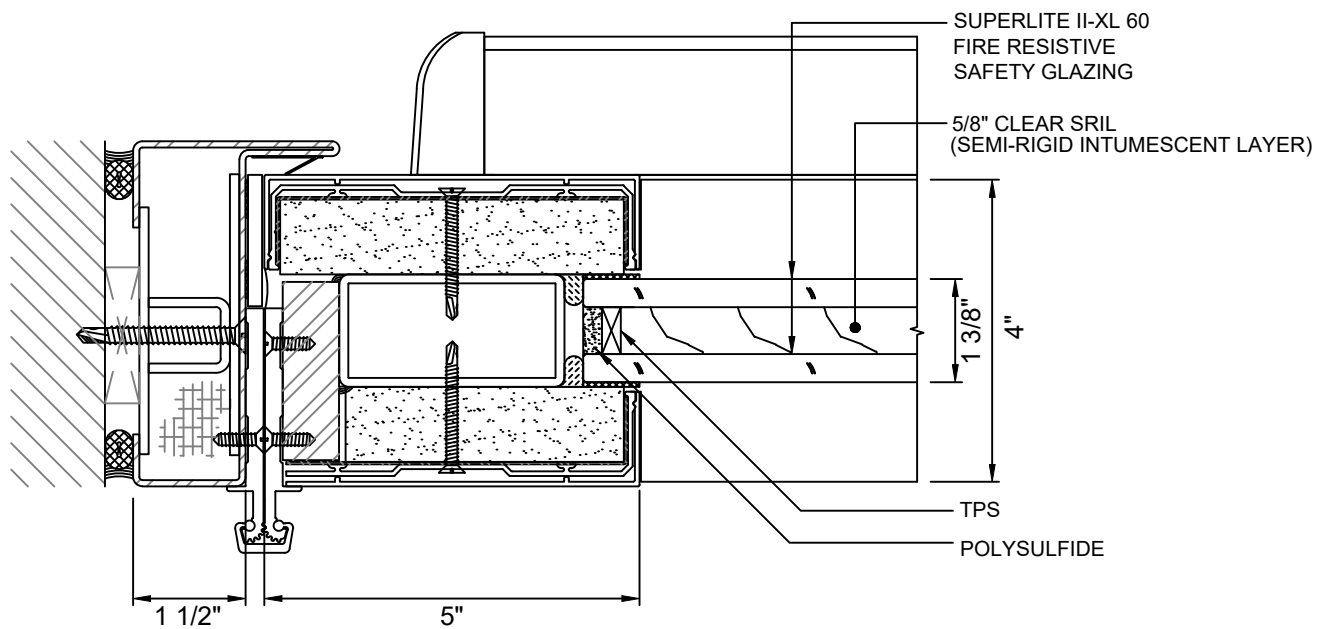

A DOOR JAMB AT HINGE
5 WITH **SUPERLITE II-XL 60**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE DOORS

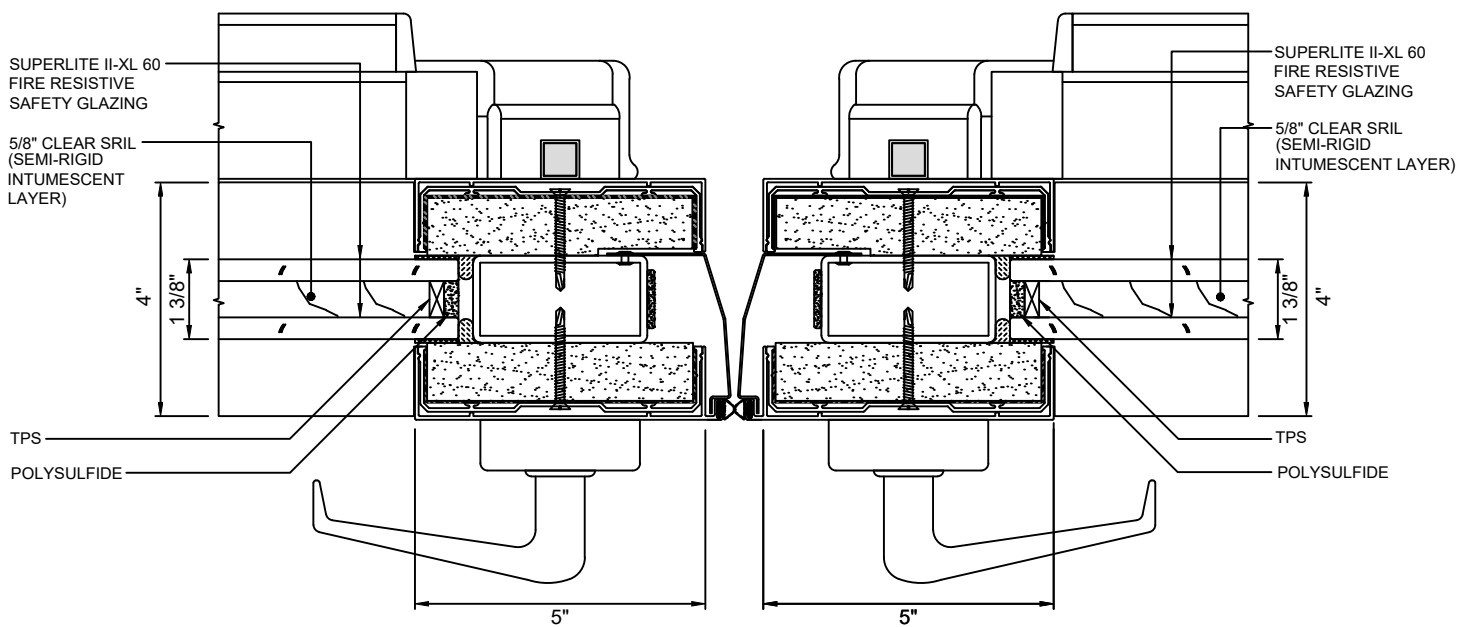

A MEETING STILES
6 WITH SUPERLITE II-XL 60